




Total Sheds • 28 Charles Street,
Willenhall, WV13 1HG
Tel: 01902 636 529
Email: info@totalsheds.co.uk

4x4ft DOG KENNEL

DELIVERED FLAT PACKED
EASY TO INSTALL SECTIONS...



Pressure Treated
Tanalised Timber for
Longer Lasting Life!



PRESSURE TREATED TANALISED TIMBER

ASSEMBLY MANUAL

SHEDS • SUMMER HOUSES • KENNELS


Version 1.1




Order Supplied with:
• 4.0 x 70mm
• 4.0 x 38mm
Easy Drill Screws

Kennel Build Area

Requires a minimum
build area.*
Please see details below.



*Actual finished dimension area 51" x 52"

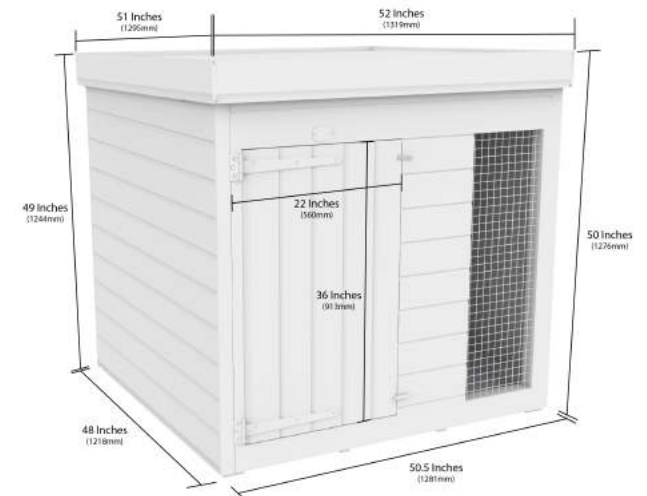

Ready to Build Dog Kennel

4x4ft Dog Kennel Check List

Your delivery should contain the following:

■ **1X** Kennel Floor



Page 3



■ **2X** Side Blocks 47"



Page 3

■ **1X** Back Panel



Page 4

■ **1X** Side Panel Right



Page 4

■ **1X** Side Panel Left



Page 5

■ **1X** Door Front



Page 5

■ **1X** Roof Panel




Page 6

■ **4X** Corner Strips



Page 6

■ **2X** 5ft Roof Felts



Page 7

■ **4X** Felt Strips



Page 7



2 Persons Required



Pressure Treated Timber

Thank you for purchasing your Dog Kennel from Total Sheds.

All of our Kennels are made from only the finest selected timber which are (Tanalised), specially pressure treated for a longer and lasting durable life span to the elements.

PLEASE NOTE: Use extreme caution when using any tools. Always wear safety gear where necessary. It is advisable that at least 2 or more persons assemble the kennel for health and safety purposes. We are not responsible for any injuries caused whilst assembling this kennel.



DELIVERED FLAT PACKED EASY TO INSTALL SECTIONS...

Each Kennel is carefully prepared in sections. Making the assembly process as easy as possible for you. Please follow our simple step-by-step guide and have your dogs new home built in no time!

Tools Required to Assemble:



HAMMER



DRILL
DRIVER



STANLEY
KNIFE



HAND
SAW

Order Supplied with:
• 4.0 x 70mm
• 4.0 x 38mm
Easy Drill Screws



Total Sheds • 28 Charles Street,
Willenhall, WV13 1HG • Tel: 01902 636 529
Email: info@totalsheds.co.uk

www.totalsheds.co.uk

© Sheds (Midlands) Limited 2021



STEP • 1

SET THE KENNEL FOUNDATION

KENNEL FLOOR BASE

Set the base for the kennel floor to build on.

Place floor down into the required position/area. (min 5x5sqft recommended)

TIPS & ADVICE: It is always good to position your kennel on a solid foundation.

Slabs or Concrete areas are ideal.



STEP • 2


FLOOR BLOCK x2

ATTACH FLOOR BLOCKS x2

Screw into the sides of the floor





FIX SIDE POST TO FLOOR EDGE WITH LARGE SCREWS

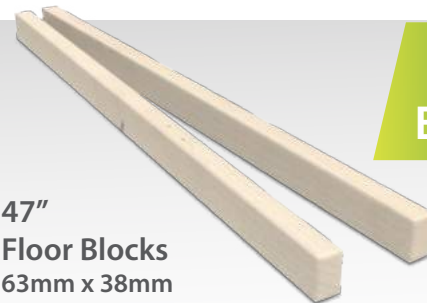

47" Floor Blocks 63mm x 38mm

• = Drill Points using screws provided as shown

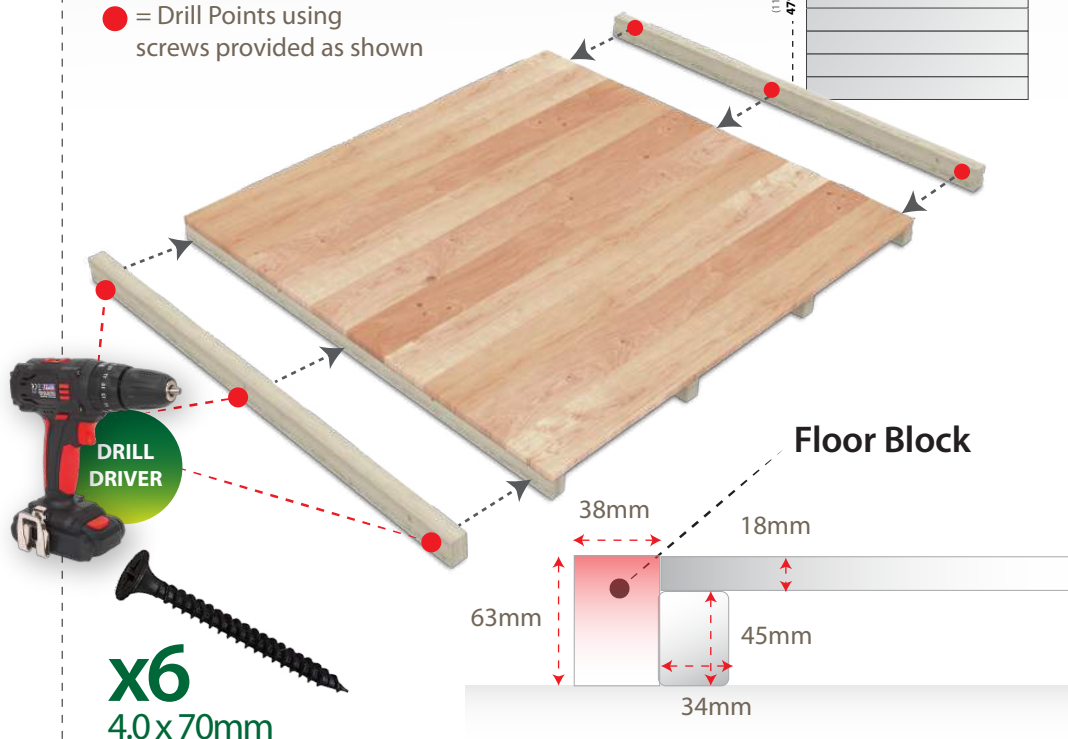


Total Sheds .co.uk **STEP • 3**

ATTACH BACK PANEL

Position Back Panel

Set within the floor planks, sitting flush with rear of floor.




DO NOT SCREW DOWN THE PANELS TO FLOOR JUST YET!
Screw only the vertical panels to create a standing frame first, allowing room for adjustments.

Total Sheds .co.uk **STEP • 4**


LEFT SIDE PANEL

Position Left Side Panel

Now place the Left Side Panel flush against the Back Panel Post.

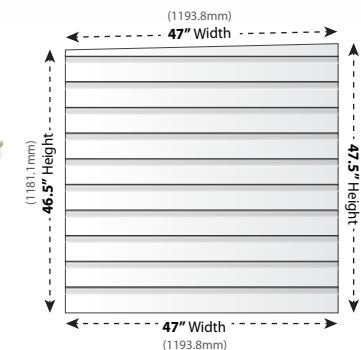

Set side panel left against back panel post as shown on this image.

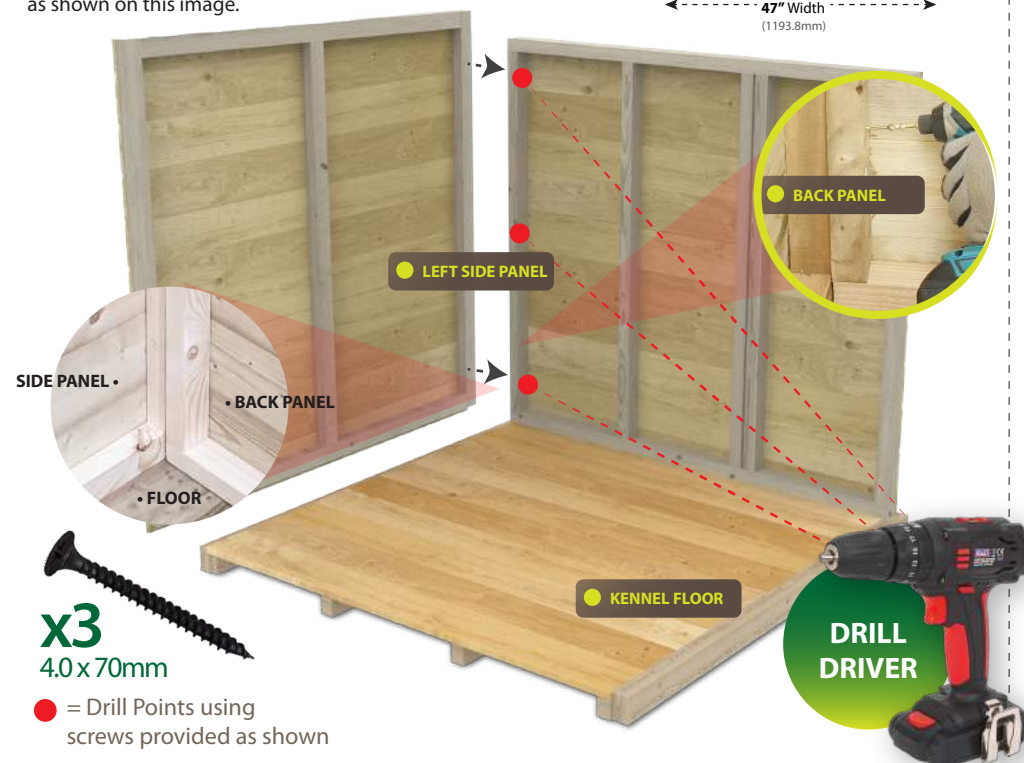




STEP • 5

RIGHT SIDE PANEL

Attach Right Side Panel

Now attach the Right Side Panel by placing on floor block as shown.

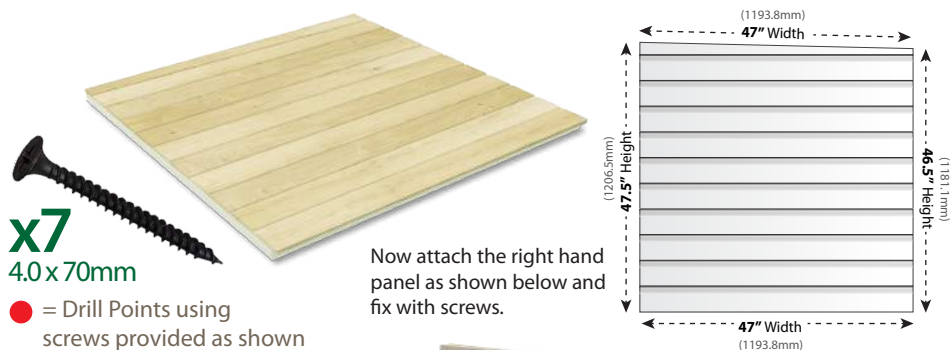

Once the 2nd floor post has been fixed in place put the right hand side panel in position and screw to side of back panel as shown.





STEP • 6

FRONT DOOR PANEL

Position the Front Panel

Now attach the Front Panel by placing in between the 2 side panels as shown below.

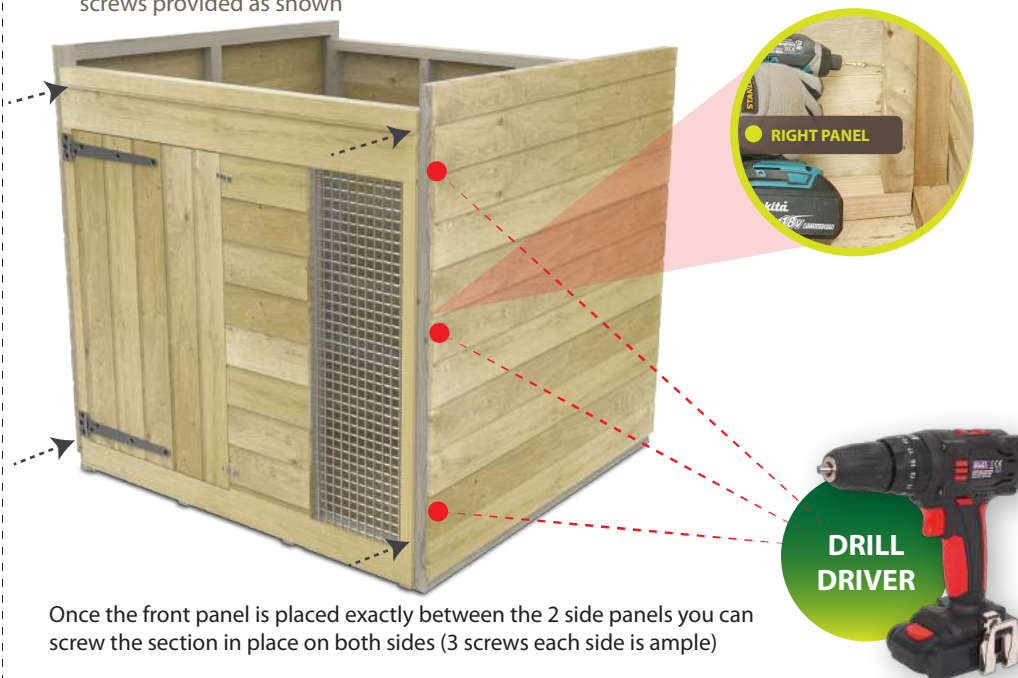
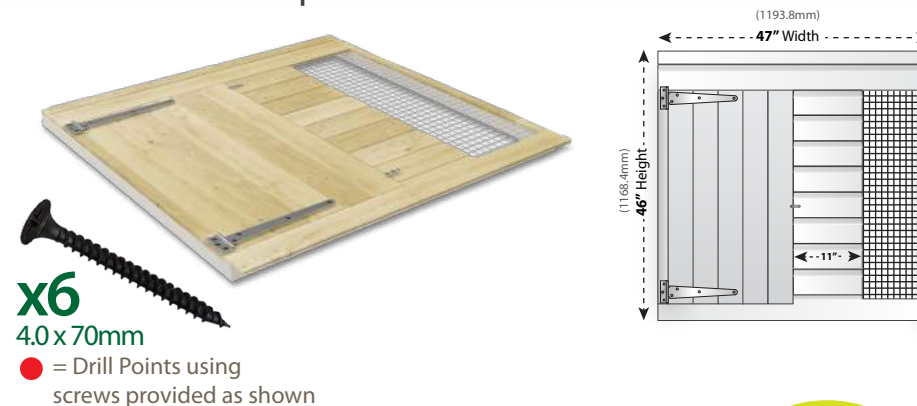


Once the front panel is placed exactly between the 2 side panels you can screw the section in place on both sides (3 screws each side is ample)

PLACE ROOF TOP

Position Kennel Roof

The Kennel Roof should slot perfectly in place between both side panels and on top of front and back panels as shown.

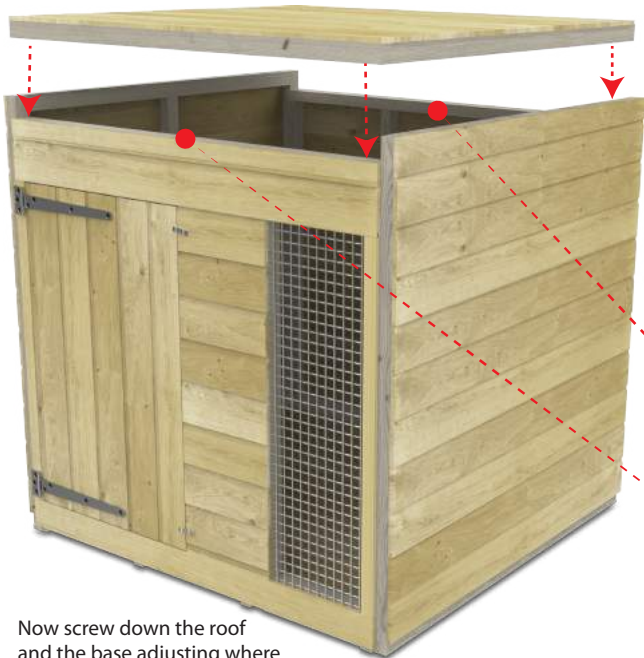

x4
4.0 x 70mm

● = Drill Points using screws provided as shown



DRILL DRIVER


Now screw down the roof and the base adjusting where need be to make final structure safe & solid.




SIDE/CORNER STRIPS

Put on Side Strips

To finish off the exposed sides use the 4 side/corner strips as shown to complete.

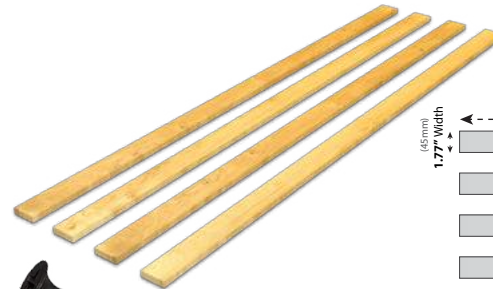


x8
4.0 x 38mm

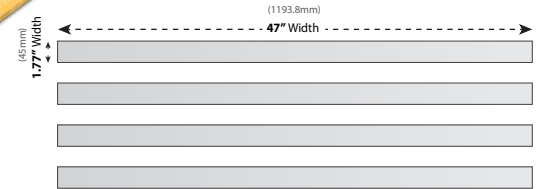

Drill the 4 Side/Corner strips in place to cover the exposed edges of the panels as shown below.

x4

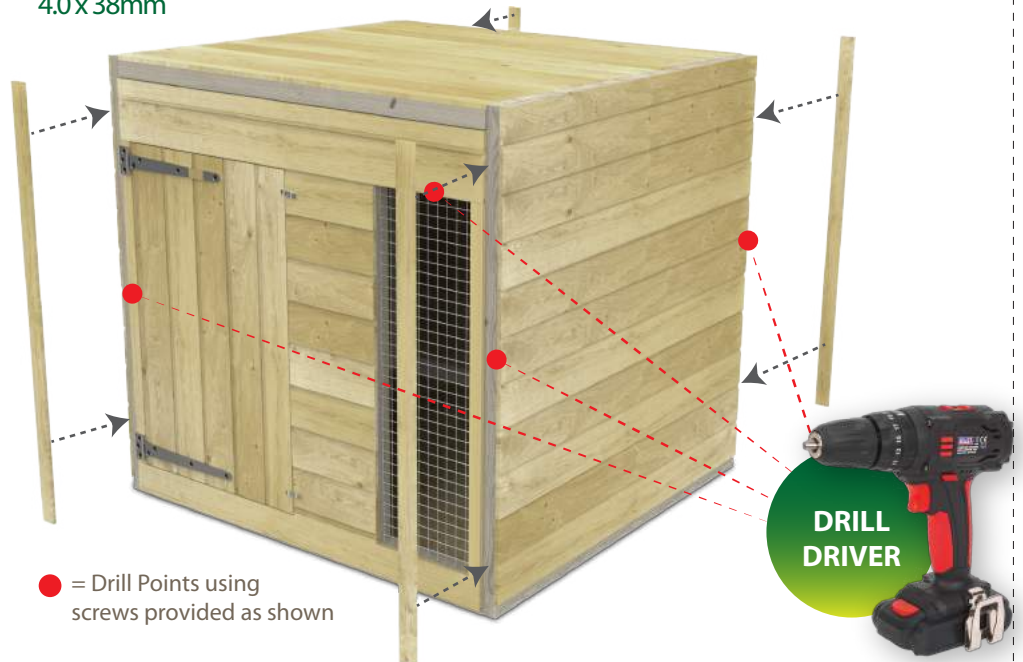

● = Drill Points using screws provided as shown



DRILL DRIVER

Total Sheds .co.uk **STEP • 9**


PLACE ROOF FELT

40kg Mineral Felt Roof


You will be provided with 2 lengths of high quality roof felt. Start with lower end of roof first.



1st Sheet at rear of roof

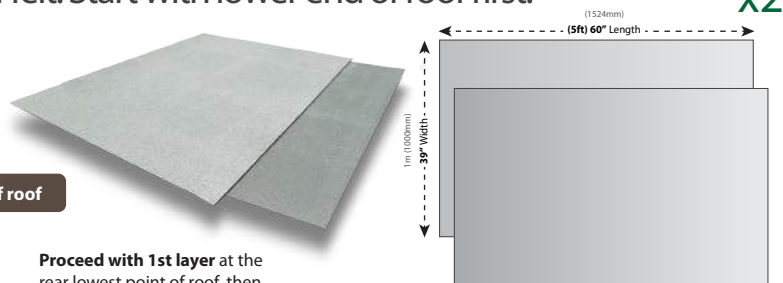

Proceed with 1st layer at the rear lowest point of roof, then overlay the other 2 sections.



2nd Sheet higher above



Trim edges with 3" overhanging



Fold over and tack edges



TACKS PROVIDED

After cutting away the excess felt, neatly fold over the edges and secure each section down by tacking them to the kennel sides. **PROTECT YOUR KENNEL AGAINST THE RAIN & ELEMENTS.**

STANLEY KNIFE

HAMMER

Total Sheds .co.uk **STEP • 10**


SIDE STRIPS

Finishing Touches!

To hide the tacked felt edges add the felt strips along the top edge of roof as shown.




*Sections may come longer than required. Please saw down to size to fit.

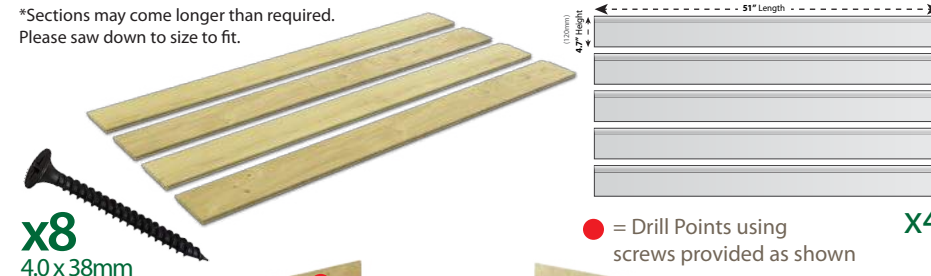

x8
4.0 x 38mm

• = Drill Points using screws provided as shown

x4

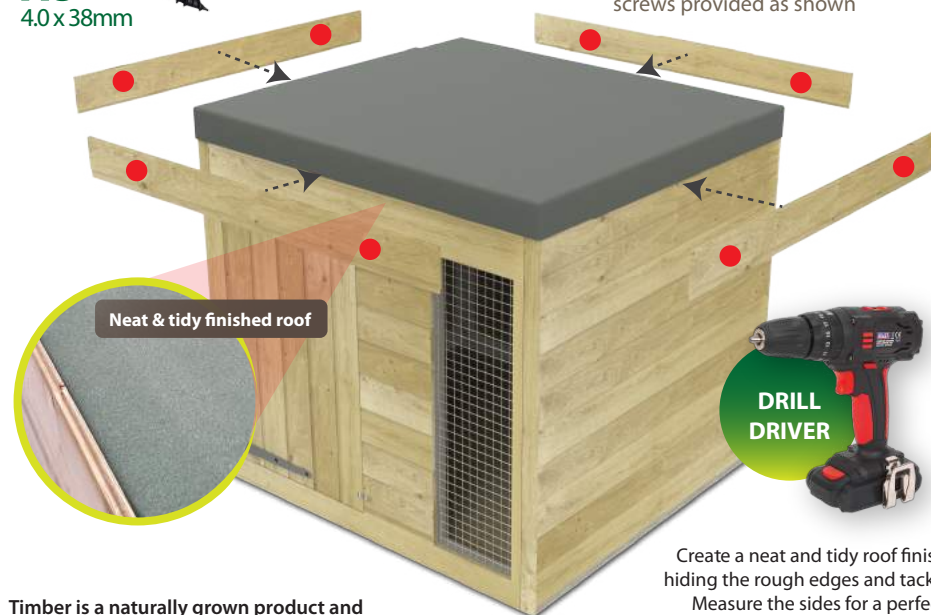

Neat & tidy finished roof

DRILL DRIVER

Create a neat and tidy roof finish hiding the rough edges and tacks. Measure the sides for a perfect cut and finish!

CONGRATULATIONS YOUR DONE!